

## SMARTMOUNT

Part Number: GS-3-SMK



GRIDSMART Technologies, Inc. works hard to make our customers' lives easier. We are proud to introduce SMARTMOUNT, designed to simplify Bell Camera installation, reduce bucket truck time and increase safety during your installation, ensuring an optimal installation.

SMARTMOUNT includes the iconic Bell Camera, GRIDSMART custom modular pole assembly, redesigned GRIDSMART Junction Box, SMARTMOUNT bracket, and Electronic Protection Module (EPM). The pole assembly provides height flexibility and has been independently tested for wind speed up to 150 mph. Shipping is simplified through the modular design.

## SPECIFICATIONS

### BELL CAMERA

Connectivity: M12  
Dimensions: 9.4" x 7.95" (23.88 x 20.19 cm)  
Weight: 5.6 lbs (2.54 kg)  
Cable Length: 162.6" (413 cm) for SMARTMOUNT Pole only

### POLE ASSEMBLY

Dimensions: 7' extension (2.1 m)  
3' elbow (.91 m)  
Weight: 13.3 lbs (6.03 kg)  
(13 lbs pipe, 0.3 lbs aluminum pipe connector)  
Material: 1.5" (3.81 cm) schedule 40 aluminum pipe - 6063-T52

### JUNCTION BOX

Connectivity: M12 (to Camera)  
RJ-45 CAT5e (to Processor)  
Dimensions: 9.5" x 3.5" x 3.5" (24.13 x 8.89 x 8.89 cm)  
Weight: 0.7 lbs (.32 kg)  
ABA Material: Polycarbonate/ASA blend,  
UV Stabilized  
Environmental: -29° F to 165° F (-34° C to 74° C)  
Rated: IP67


### MOUNTING KIT

Weight: 2.75 lbs (1.25 kg)  
(2 lbs camera mounting hardware and screws, 0.75 lbs cable)  
Wind Tunnel Tested: >150 mph

Updated 2/20/19

## SMARTMOUNT

Part Number: GS-3-SMK

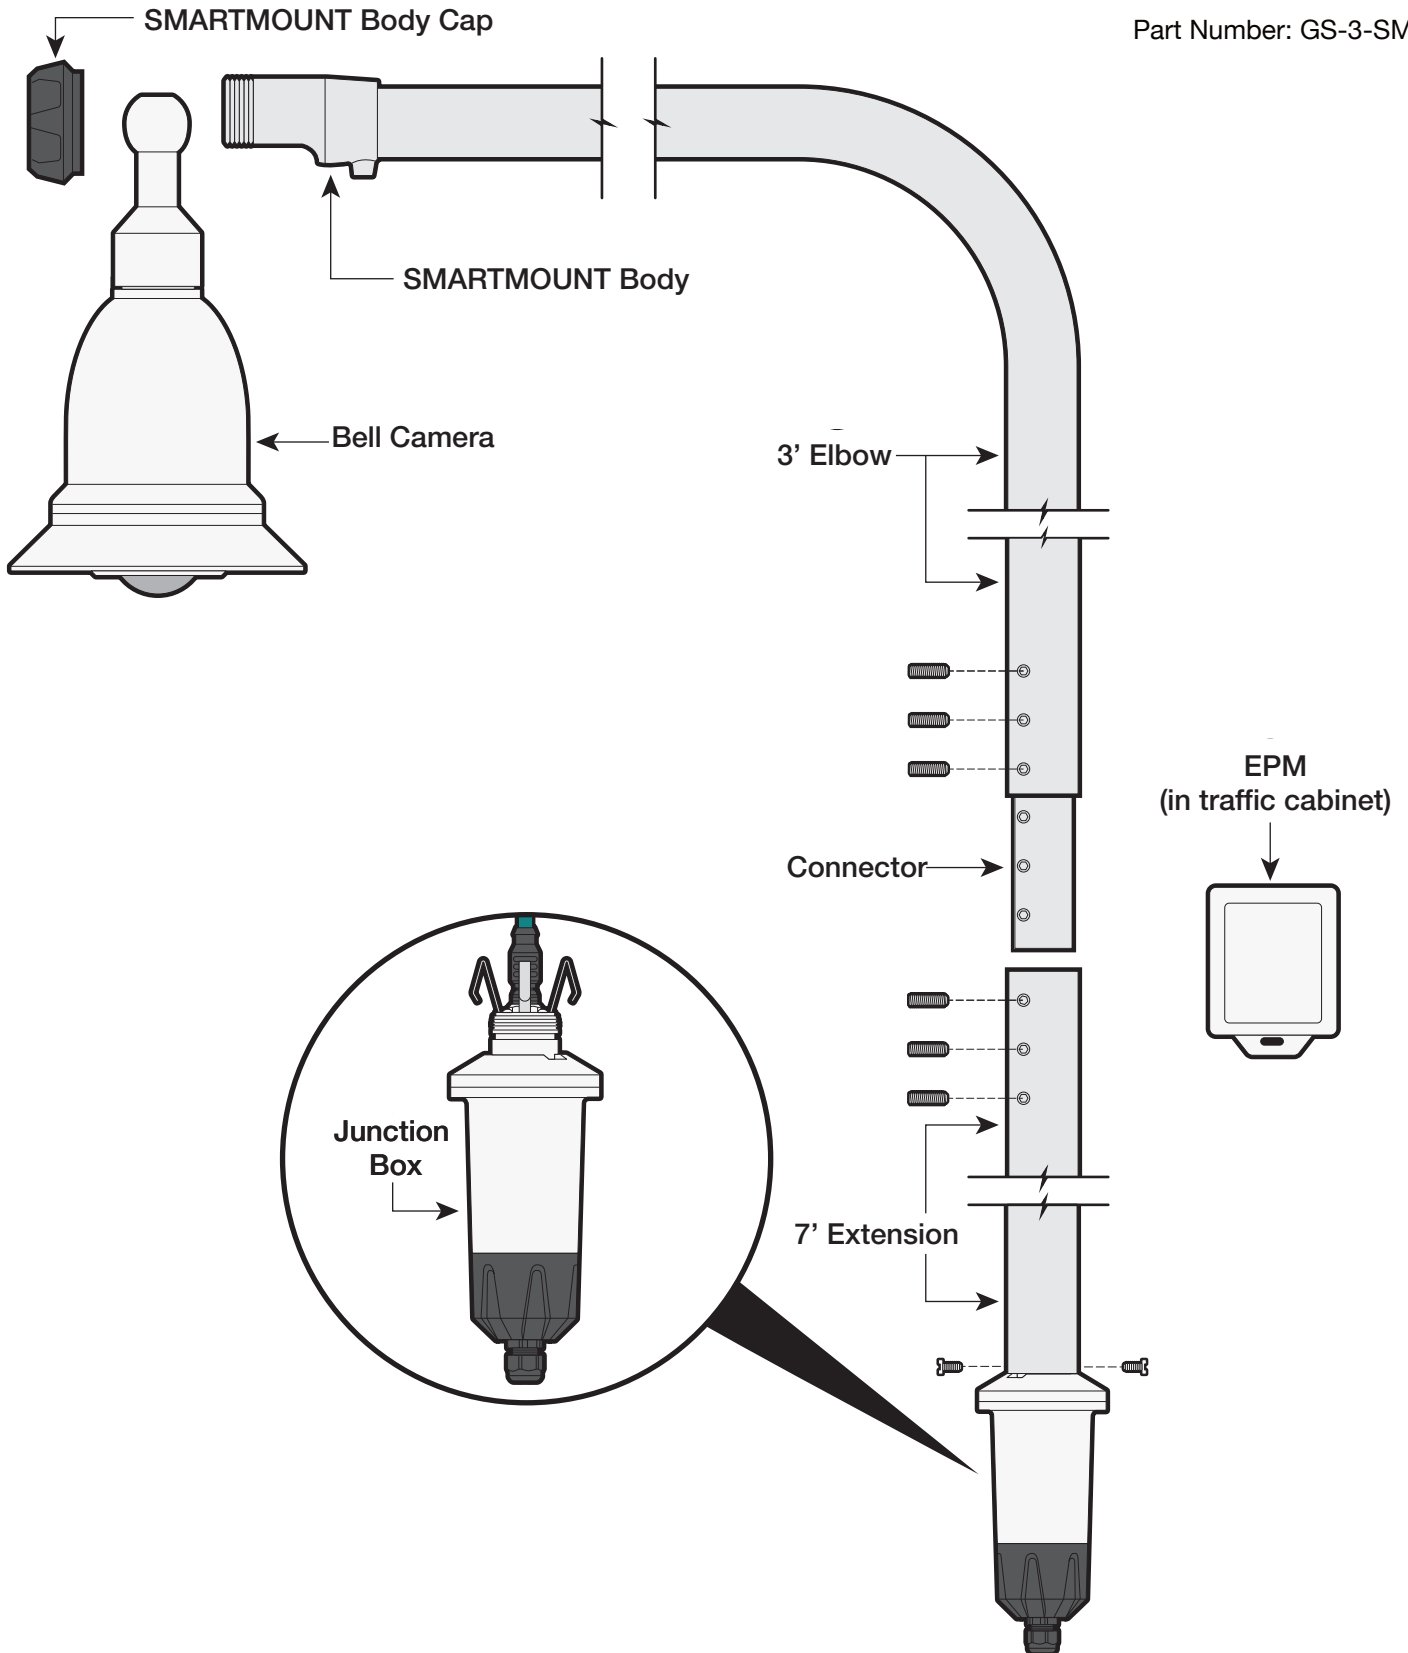

Updated 2/20/19