


## Features and Benefits

- **Small Size and Lightweight**
- **Near Ideal Performance**  
-Ultra low insertion loss and good rejection
- **Precision**  
-Low part-to-part variation
- **Ease of Assembly**  
-Standard SMT processes
- **Characteristic Impedance**  
-50Ω

## Applications

- **Satellite Communications**

Part Number PSF28B02V2S

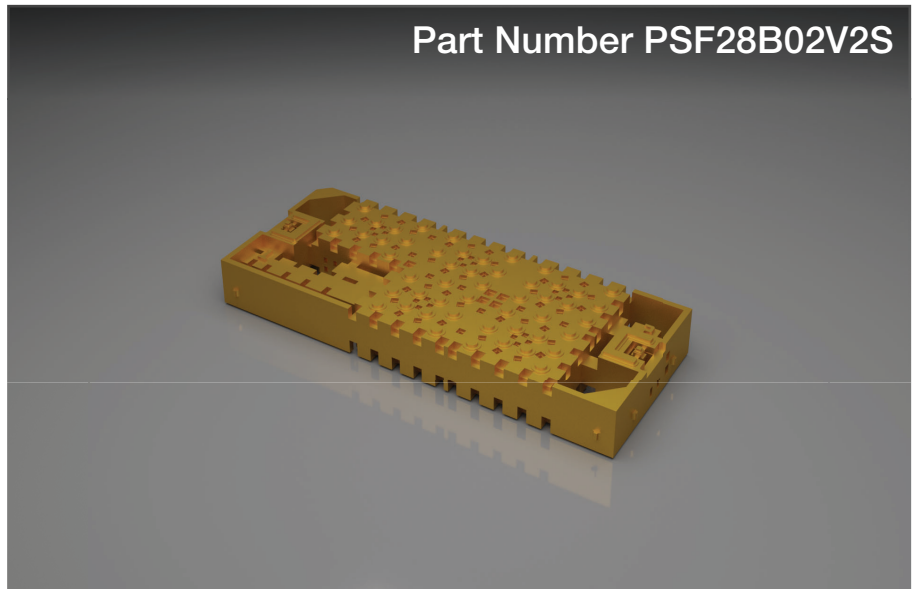

## 27.5-30 GHz Bandpass Filter

### Surface mount Ka band filter in a miniature form factor.


#### Description

Nuvotronics PolyStrata® Technology provides high performance filtering in a small form factor (13.83mm x 5.57mm x 1.5mm). The PSF28B02V2S surface-mount interdigital filter provides ultra low insertion loss and high rejection. Typical insertion loss performance is < 0.4 dB across the 27.5 - 30 GHz band. This part is ideal for space or ground applications. The filter is compliant with standard SMT assembly processes. Tape and reel packaging is available for bulk orders.

## Typical Electrical Performance\*

Parameter	Frequency Range (GHz)	Min	Typ	Max
Insertion Loss (dB)	27.5 - 30	-	0.4	0.6
Return Loss (dB)		12	15	-
Rejection (dB)	15.7 - 20.2	-	75	-
	25.25	20	25	-
	33.5	40	50	-

\*The specifications above are valid at ambient temperature. Insertion loss performance over -40°C to 85°C may vary by +/- 0.2 dB.

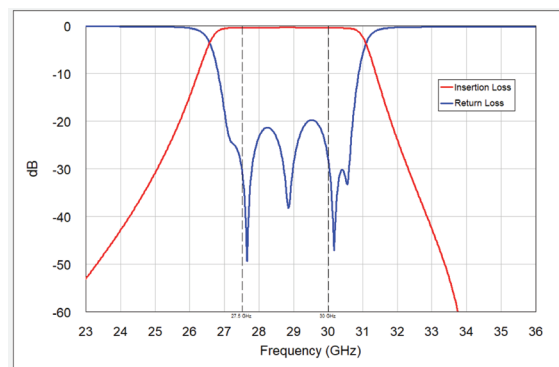


### Additional Details

Special Handling / Storage Instructions	
Storage	IAW IPC-4553A
ESD Sensitivity	None
Ordering Information	PSF28B02V2S
Standard Packaging	Tape and Reel
Alternative Packaging Available	Waffle Pack
Component Termination Finish	Immersion Silver, Immersion Gold
Export Certifications	5A991.a


### Absolute Maximum Ratings

Power	TBD
Operating Temp	-55°C to 125°C
Solder Reflow	260°C max. for 10 seconds, 3 cycles
Epoxy Attach	150°C max. for 90 minutes


### Simplified Block Diagram

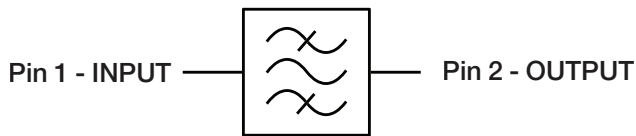

### Component View

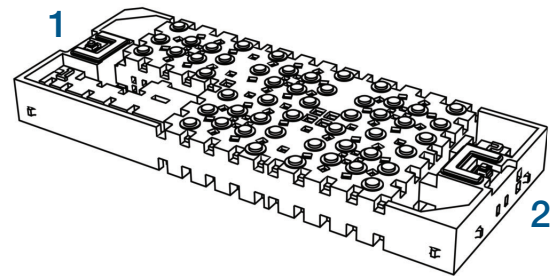


### PCB Layout

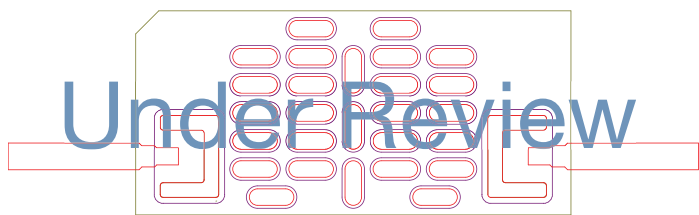


Legend: TOP METAL ■ SOLDER MASK ■ PART OUTLINE ■

Drawings available upon request

### Mechanical Drawing

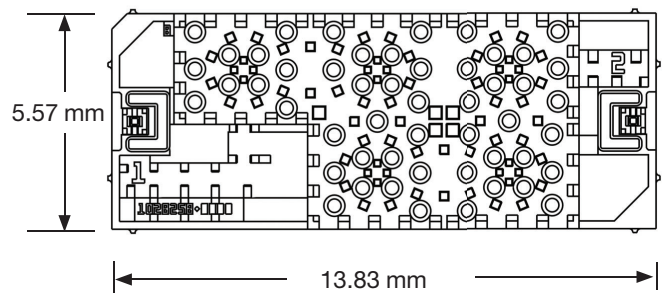

Bottom



Front